

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Express Mail Label No.

jc93d U.S. PRO
09/717129
11/22/00

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 14]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 5]
4. ☒ Oath or Declaration [Total Pages: 3]
- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
- i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Microfiche Computer Program (*Appendix*)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (*if applicable, all necessary*)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

8. ☒ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement (*when there is an assignee*) ☐ Power of Attorney

10. ☐ English Translation Document (*if applicable*)

11. ☒ Information Disclosure Statement (IDS)/PTO-1449☒ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503) (*Should be specifically itemized*)

14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.

15. ☒ Certified Copy of Priority Document(s) (*if foreign priority is claimed*)

16. ☐ Other:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: /

[REDACTED]

21171

PATENT TRADEMARK OFFICE

© 2000 Staas & Halsey

OPTICAL MULTIPLEXING APPARATUS AND OPTICAL MULTIPLEXING METHOD

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an optical multiplexing technology for multiplexing a plurality of optical signals of different wavelengths. More particularly, the invention relates to an optical multiplexing apparatus for reliably multiplexing a plurality of optical signals having narrow wavelength intervals with a simple constitution, and to an optical multiplexing method.

2. Description of the Related Art

In the optical communications in recent years, it has been desired to increase the transmission capacity, and a wavelength division multiplexing (WDM) system has been developed as one of the means. In the optical transmission system according to the WDM system, in general, optical signals of plural wavelengths are transmitted through a single optical transmission line, and are demultiplexed or multiplexed in accordance with their wavelengths while being amplified through an optical amplifier so as to be transmitted to a desired terminal station.

In the optical transmission system according to the WDM system, efforts have been made to further increase the transmission capacity by decreasing the wavelength intervals (channel intervals) of a plurality of optical signals. For example, there has been proposed a system in which the wavelength interval is decreased to be from 100GHz to 50GHz. In the above optical transmission system, technology becomes necessary for widening a transmission band without the occurrence of crosstalk among the channels, so that the reliable multiplexing or demultiplexing of the optical signals can be performed in accordance with the wavelengths.

As the conventional optical multiplexing technology for multiplexing optical signals of narrow wavelength intervals, there can be exemplified the one disclosed in Japanese Unexamined Patent Publication No. 58-70652 (Japanese Patent No. 1427285). This publication is constituted by the combination of an optical multiplexing circuit having wavelength dependency and an optical multiplexing circuit

without wavelength dependency. For example, optical signals of every other wavelengths are multiplexed by a first optical multiplexing circuit having wavelength dependency, optical signals of the remaining wavelengths are multiplexed by a second optical multiplexing circuit having wavelength dependency, and output light from the first and second optical multiplexing circuits are multiplexed together by an optical multiplexing circuit without wavelength dependency.

However, when the wavelength intervals of the optical signals to be multiplexed are set to be as very narrow as, for example, 50GHz, the influence of nonlinear optical effect becomes a problem together with the occurrence of crosstalk among the channels. Concretely speaking, when the optical signals of neighboring wavelengths are under the same polarization state in a wavelength interval of 50GHz, it is considered that the power levels of the respective optical signals are susceptible to the influence of the nonlinear optical effect such as the four light wave mixing. In order to relax the nonlinear optical effect, it is effective to differ the polarizing state of the neighboring wavelengths and, particularly effective to employ a cross polarization system.

However, it is not easy to multiplex the optical signals having narrow wavelength intervals while maintaining their polarization states. When an existing optical device is considered, such as an arrayed waveguide grating (hereinafter referred to as AWG), it is relatively easy to multiplex a plurality of optical signals in the identical polarization state while maintaining their polarization state, but it is very difficult to realize the multiplexing when they are in different polarization states. Besides, even if an optical device is realized which capable of multiplexing such optical signals, its cost will be very high.

Further, even if the nonlinear optical effect is relaxed by the employment of the cross polarization system, crosstalk occurs among the channels accompanying a decrease in the wavelength interval unless the optical device multiplexing the optical signals exhibits sharp filter characteristics, to deteriorate the transmission characteristics. The sharp filter characteristics referred to here stand for that the transmission band width of the filter is narrow to a sufficient degree.

According to the conventional optical multiplexing technology disclosed in the above Japanese Unexamined Patent Publication No. 58-70652, optical signals of

neighboring wavelengths are multiplexed while maintaining the cross polarization state. It is possible to decrease the influence due to the nonlinear optical effect accompanying a decrease in the wavelength interval but it is difficult to sufficiently suppress the occurrence of crosstalk among the channels. That is, the above conventional technique uses interference-film type optical devices as the first and second optical multiplexing circuits. In general, however, since the interference-film type optical devices have poor filter characteristics, the wavelength interval that can be coped with is restricted. When the wavelength interval becomes as narrow as about 50GHz, although the optical devices having a wavelength interval of twice as wide can be used as the first and second optical multiplexing circuits, it is impossible to avoid deterioration in the transmission characteristics due to crosstalk only by simply multiplexing a set of cross polarized optical signals without any contrivance for suppressing the crosstalk in the third optical multiplexing circuit.

SUMMARY OF THE INVENTION

The present invention was accomplished by giving attention to the above-mentioned points, and has an object of providing an optical multiplexing apparatus of a low cost capable of reliably multiplexing a plurality of optical signals having narrow wavelength intervals while suppressing the nonlinear optical effect and crosstalk, and an optical multiplexing method.

In order to accomplish the above-mentioned object, an optical multiplexing apparatus according to the present invention, as shown in Fig. 1, for multiplexing a plurality of optical signals having different wavelengths, comprises:

first optical multiplexing means 1 for multiplexing, among a plurality of optical signals that are input with directions of linear polarization of neighboring wavelengths being differed to each other and are successively given wavelength numbers depending upon the wavelengths, optical signals corresponding to odd wavelength numbers while maintaining their polarization states;

second optical multiplexing means 2 for multiplexing optical signals corresponding to even wavelength numbers among said plurality of optical signals while maintaining their polarization states; and

third optical multiplexing means 3 including:

a first input unit 3A for filtering the optical signals multiplexed by said first optical multiplexing means in accordance with filter characteristics that include a

transmission wavelength band with the wavelengths of odd numbers as centers, and have the band width of said transmission wavelength band which is narrower than the band width of transmission wavelength band of filter characteristics of said first optical multiplexing means;

a second input unit 3B for filtering the optical signals multiplexed by said second optical multiplexing means in accordance with filter characteristics that include a transmission wavelength band with the wavelengths of even numbers as centers, and have the band width of said transmission wavelength band which is narrower than the band width of transmission wavelength band of filter characteristics of said second optical multiplexing means; and

an output unit 3C for multiplexing the optical signals output from said first input unit 3A and the optical signals output from said second input unit 3B to output the multiplexed signal light.

According to this constitution, a plurality of optical signals that are input with directions of polarization of neighboring wavelengths being differed to each other are grouped into optical signals of odd wavelength numbers and optical signals of even wavelength numbers, to be multiplexed by the first optical multiplexing means and the second optical multiplexing means, respectively, while maintaining their polarization states. The optical signals having odd wavelength numbers and having even wavelength numbers are further multiplexed by the third optical multiplexing means having filter characteristics more sharp than those of the first and second optical multiplexing means 1 and 2, to be output as a WDM signal light. This makes it possible to reliably multiplex a plurality of optical signals having narrow wavelength intervals while suppressing the influence of nonlinear optical effect and the occurrence of crosstalk.

With the above optical multiplexing apparatus, it is preferable that a plurality of optical signals are input with directions of linear polarization of neighboring wavelengths being orthogonal to each other. This makes it possible to reliably decrease the influence of nonlinear optical effect.

As the concrete constitution of the above optical multiplexing apparatus, further, the third optical multiplexing means 3 may be provided with a function for maintaining a polarization state. This makes it possible to multiplex the optical signals having odd wavelength numbers and even wavelength numbers in a state

where directions of polarization of the neighboring wavelengths are more reliably differed to each other.

Further, an optical multiplexing method according to the present invention, of multiplexing a plurality of optical signals having different wavelengths, comprising:

a first optical multiplexing step of multiplexing, among a plurality of optical signals that are input with directions of linear polarization of neighboring wavelengths being differed to each other and are successively given wavelength numbers depending upon the wavelengths, optical signals corresponding to odd wavelength numbers while maintaining their polarization states;

second optical multiplexing step of multiplexing optical signals corresponding to even wavelength numbers among said plurality of optical signals while maintaining their polarization states; and

third optical multiplexing step of:

filtering the optical signals multiplexed by said first optical multiplexing step in accordance with filter characteristics that include a transmission wavelength band with the wavelengths of odd numbers as centers, and have the band width of said transmission wavelength band which is narrower than the band width of transmission wavelength band of filter characteristics of said first optical multiplexing step;

filtering the optical signals multiplexed by said second optical multiplexing means in accordance with filter characteristics that include a transmission wavelength band with the wavelengths of even numbers as centers, and have the band width of said transmission wavelength band which is narrower than the band width of transmission wavelength band of filter characteristics of said second optical multiplexing step; and

multiplexing the respective filtered optical signals to output the multiplexed signal light.

Other objects, features and advantages of the invention will become apparent from the following description of the embodiment in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing a basic constitution of an optical multiplexing

apparatus according to the present invention;

Fig. 2 is a block diagram showing the constitution of an optical multiplexing apparatus according to an embodiment of the present invention;

Fig. 3 is a diagram showing filter characteristics of an AWG used in the embodiment, wherein Fig. 3A shows characteristics of the AWG on the odd wavelength number side, and Fig. 3B shows characteristics of the AWG on the even wavelength number side;

Fig. 4 is a diagram showing filter characteristics corresponding to respective input ports of an interleaver used in the above embodiment, wherein Fig. 4A shows characteristics corresponding to the input port on the odd wavelength number side, and Fig. 4B shows characteristics corresponding to the input port on the even wavelength number side; and

Fig. 5 is a diagram showing a concrete constitutional example for realizing the filter characteristics of the interleaver used in the above embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENT

An embodiment of the invention will now be described with reference to the drawings.

Fig. 2 is a diagram showing a constitution of an optical multiplexing apparatus according to the embodiment of the present invention.

In Fig. 2, the present optical multiplexing apparatus includes: in-line amplifiers 41_1 to 41_{32} , 42_1 to 42_{32} and 43_1 to 43_{32} of a three-stage constitution for amplifying incident optical signals of a plurality of wavelengths (here, 32 waves are presumed, and their wavelengths are denoted by λ_1 to λ_{32}) for each of the wavelengths; dispersion compensation fibers (hereinafter referred to as DCFs) 50_1 to 50_{32} connected, respectively, between the in-line amplifiers 42_1 to 42_{32} of the second stage and the in-line amplifiers 43_1 to 43_{32} of the third stage; an array waveguide grating (AWG) 10 as a first optical multiplexing means 1 for multiplexing optical signals output from the in-line amplifiers $43_1, \dots, 43_{31}$ corresponding to wavelengths of odd numbers $\lambda_1, \dots, \lambda_{31}$; an array waveguide grating (AWG) 20 as a second optical multiplexing means 2 for multiplexing optical signals output from the in-line amplifiers $43_2, \dots, 43_{32}$ corresponding to wavelengths of even numbers $\lambda_2, \dots, \lambda_{32}$; an interleaver 30 as a third optical multiplexing means 3 for further multiplexing optical signals of odd

wavelength dispersion, the DCFs 50₁ to 50₃₂ may be omitted. Moreover, when it is difficult to use the dispersion compensation devices having a function for maintaining the polarization, the dispersion may be compensated by the dispersion compensation devices of the polarization independent type on or after the output side of the interleaver 30.

The AWGs 10 and 20 are known optical devices for multiplexing/demultiplexing the optical signals by utilizing the multiple beam interference. Here, the AWG 10 has input ports corresponding to the optical signals of odd wavelengths $\lambda_1, \dots, \lambda_{31}$ and an output port, and multiplexes the optical signals of the odd wavelength numbers while maintaining their polarization to output the multiplexed signal light. The AWG 20 has input ports corresponding to the optical signals of even wavelengths $\lambda_2, \dots, \lambda_{32}$ and an output port, and multiplexes the optical signals of the even wavelengths while maintaining their polarization to output the multiplexed signal light. As the AWG of the type of maintaining the polarization, such an AWG is suitable, wherein a waveguide is formed by using a material having a large index of double refraction to realize the function of maintaining the polarization.

Fig. 3 is a diagram showing filter characteristics possessed by the AWGs 10 and 20, wherein Fig. 3A shows characteristics of the AWG 10 and Fig. 3B shows characteristics of the AWG 20.

As shown in Fig. 3A, the AWG 10 has periodic filter characteristics in which the transmissivity becomes a maximum corresponding to odd wavelengths $\lambda_1, \lambda_3, \dots$, and the AWG 20 has, as shown in Fig. 3B, periodic filter characteristics in which the transmissivity becomes a maximum corresponding to the even wavelengths $\lambda_2, \lambda_4, \dots$.

The interleaver 30 is an optical device having two input ports P₁, P₂ and one output port P₃, and has periodic filter characteristics.

Fig. 4 is a diagram showing filter characteristics corresponding to the input ports of the interleaver 30, wherein Fig. 4A shows transmission wavelength characteristics corresponding to the input port P₁ and Fig. 4B shows transmission wavelength characteristics corresponding to the input port P₂.

Referring to Fig. 4A, the filter characteristics corresponding to the input port P_1 have periodic characteristics in which the transmissivity becomes a maximum corresponding to the odd wavelengths $\lambda_1, \lambda_3, \dots$, and the widths of the transmission wavelength bands with the respective odd wavelengths as centers are narrower than the widths of the transmission wavelength bands in the filter characteristics of the AWG 10 shown in Fig. 3A. Referring to Fig. 4B, further, the filter characteristics corresponding to the input port P_2 have periodic characteristics in which the transmissivity becomes a maximum corresponding to the even wavelengths $\lambda_2, \lambda_4, \dots$, and the widths of the transmission wavelength bands with the respective even wavelengths as centers are narrower than the widths of the transmission wavelength bands in the filter characteristics of the AWG 20 shown in Fig. 3B.

The respective optical signals of odd wavelengths and even wavelengths input to the respective input ports P_1, P_2 are filtered in accordance with the above-mentioned characteristics, and then multiplexed, and WDM signal light maintained in a cross polarization state is output from the output port P_3 . The respective optical transmission lines connected to the input ports P_1 and P_2 of the interleaver 30 have a function for maintaining the polarization. Further, it is desired that the interleaver 30 itself is a device having a function for maintaining the polarization. However, when the respective optical signals of odd wavelengths and even wavelengths input to the interleaver 30, are reliably maintained in the cross polarization state, there may be used a device of the polarization independent type.

An advantage of multiplexing the respective optical signals odd wavelengths and even wavelengths output, respectively, from the AWGs 10 and 20, is in that the respective optical signals having very narrow wavelength intervals can be multiplexed while suppressing the crosstalk as a result of filtering the respective optical signals by combining sharp filtering characteristics as shown in Fig. 4. As a concrete example for realizing the filter characteristics as shown in Fig. 4, technology has been proposed in an article: Dingel Benjamin, et al., "Multifunctional Optical Filter using a Michelson GT Interferometer (MGTI)", Shingaku Giho, OCS 97-50, pp. 67-72, 1997. This technology will be briefly described here.

The multifunctional optical filter using MGTI disclosed in the above article has a constitution in which a reflecting mirror in the typical Michelson interferometer is replaced by a Gires-Tournois resonator (hereinafter abbreviated as GTR) as shown in

odd wavelengths and the optical signals of even wavelengths multiplexed by the respective AWGs 10 and 20, are further multiplexed by the interleaver 30, and then amplified up to a required level to be output.

As described above, a plurality of optical signals maintained in a cross polarization state are divided into the optical signals of odd wavelengths and the optical signals of even wavelengths to be multiplexed individually. Therefore, even when the wavelength interval is set to be as very narrow as, for example, 50GHz, it is possible to use the existing AWG corresponding to a wavelength interval of twice as wide (100GHz). Further, the AWGs 10 and 20 are required to have a function of maintaining the polarization. Here, the directions of polarization of the optical signals multiplexed by the AWGs 10 and 20 are oriented in one direction. Therefore, as mentioned above, if the waveguides of the AWGs 10 and 20 are formed by using for example a material of a large double refractive index, the function for maintaining the polarization can be easily realized, making it possible to use the AWGs 10 and 20 of a low cost. On the other hand, the AWG utilizing the multiple beam interference does not exhibit sufficiently sharp filter characteristics. It is therefore probable that the crosstalk occurs among the channels if the optical signals multiplexed by the respective AWGs 10 and 20 are simply multiplexed for their wavelengths. Therefore, in the apparatus of the present invention, the occurrence of crosstalk is suppressed by multiplexing the optical signals of odd wavelengths and the optical signals of even wavelengths by utilizing the interleaver 30 having filter characteristics which are more sharp than those of the AWGs 10 and 20.

By the combination of the AWGs 10, 20 with the interleaver 30, it becomes possible to lower the nonlinear optical effect and to reliably multiplex a plurality of optical signals having narrow wavelength intervals while suppressing the crosstalk. In such an optical multiplexing apparatus, when up-grading the system, it is possible to increase or decrease the number of channels separately for the optical signals of odd wavelengths and for the optical signals of even wavelengths, offering convenience.

In the above-mentioned embodiment, 32 waves were multiplexed and the wavelength interval was set to be 50GHz. The present invention, however, is in no way limited thereto only. Further, the wavelength band was described as a $1.5\mu\text{m}$ band. The invention, however, can also be applied when the optical signals of other wavelength band are to be multiplexed.

What is claimed are:

1. An optical multiplexing apparatus for multiplexing a plurality of optical signals having different wavelengths, comprising:

first optical multiplexing means for multiplexing, among a plurality of optical signals that are input with directions of linear polarization of neighboring wavelengths being differed to each other and are successively given wavelength numbers depending upon the wavelengths, optical signals corresponding to odd wavelength numbers, while maintaining their polarization states;

second optical multiplexing means for multiplexing optical signals corresponding to even wavelength numbers among said plurality of optical signals, while maintaining their polarization states; and

third optical multiplexing means including:

a first input unit for filtering the optical signals multiplexed by said first optical multiplexing means in accordance with filter characteristics that include a transmission wavelength band with the wavelengths of odd numbers as centers, and have the band width of said transmission wavelength band which is narrower than the band width of transmission wavelength band of filter characteristics of said first optical multiplexing means;

a second input unit for filtering the optical signals multiplexed by said second optical multiplexing means in accordance with filter characteristics that include a transmission wavelength band with the wavelengths of even numbers as centers, and have the band width of said transmission wavelength band which is narrower than the band width of transmission wavelength band of filter characteristics of said second optical multiplexing means; and

an output unit for multiplexing the optical signals output from said first input unit and the optical signals output from said second input unit to output the multiplexed signal light.

2. An optical multiplexing apparatus according to claim 1, wherein said plurality of optical signals are input with directions of linear polarization of neighboring wavelengths being orthogonal to each other.

3. An optical multiplexing apparatus according to claim 1, wherein said third optical multiplexing means is provided with a function for maintaining the polarization state.

4. An optical multiplexing method of multiplexing a plurality of optical signals having different wavelengths, comprising:

a first optical multiplexing step of multiplexing, among a plurality of optical signals that are input with directions of linear polarization of neighboring wavelengths being differed to each other and are successively given wavelength numbers depending upon the wavelengths, optical signals corresponding to odd wavelength numbers, while maintaining their polarization states;

second optical multiplexing step of multiplexing optical signals corresponding to even wavelength numbers among said plurality of optical signals, while maintaining their polarization states; and

third optical multiplexing step of:

filtering the optical signals multiplexed by said first optical multiplexing step in accordance with filter characteristics that include a transmission wavelength band with the wavelengths of odd numbers as centers, and have the band width of said transmission wavelength band which is narrower than the band width of transmission wavelength band of filter characteristics of said first optical multiplexing step;


filtering the optical signals multiplexed by said second optical multiplexing means in accordance with filter characteristics that include a transmission wavelength band with the wavelengths of even numbers as centers, and have the band width of said transmission wavelength band which is narrower than the band width of transmission wavelength band of filter characteristics of said second optical multiplexing step; and


multiplexing the respective filtered optical signals to output the multiplexed signal light.



ABSTRACT

The present invention has an object to provide an optical multiplexing apparatus of a low cost capable of reliably multiplexing a plurality of optical signals having a narrow wavelength interval, while suppressing the nonlinear optical effect and the crosstalk, and a multiplexing method. The optical multiplexing apparatus comprises first optical multiplexing means for multiplexing, among a plurality of optical signals that are input with directions of linear polarization of the neighboring wavelengths being differed to each other, optical signals having odd wavelength numbers while maintaining their polarization states, second optical multiplexing means for multiplexing optical signals having even wavelength numbers while maintaining their polarization states, and third optical multiplexing means for multiplexing, at an output unit thereof through first and second input units having sharp filtering characteristics, the optical signals multiplexed by the first and second optical multiplexing means, to output WDM signal light.

FIG.1

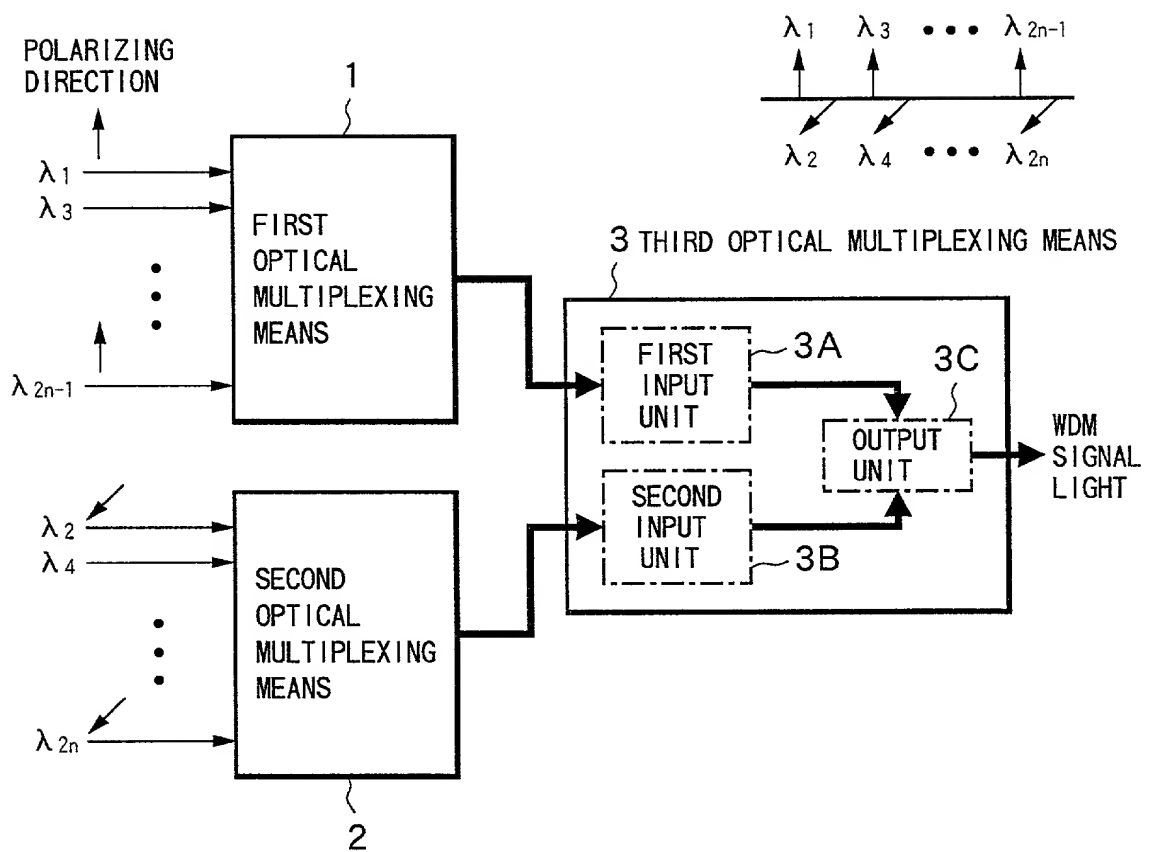

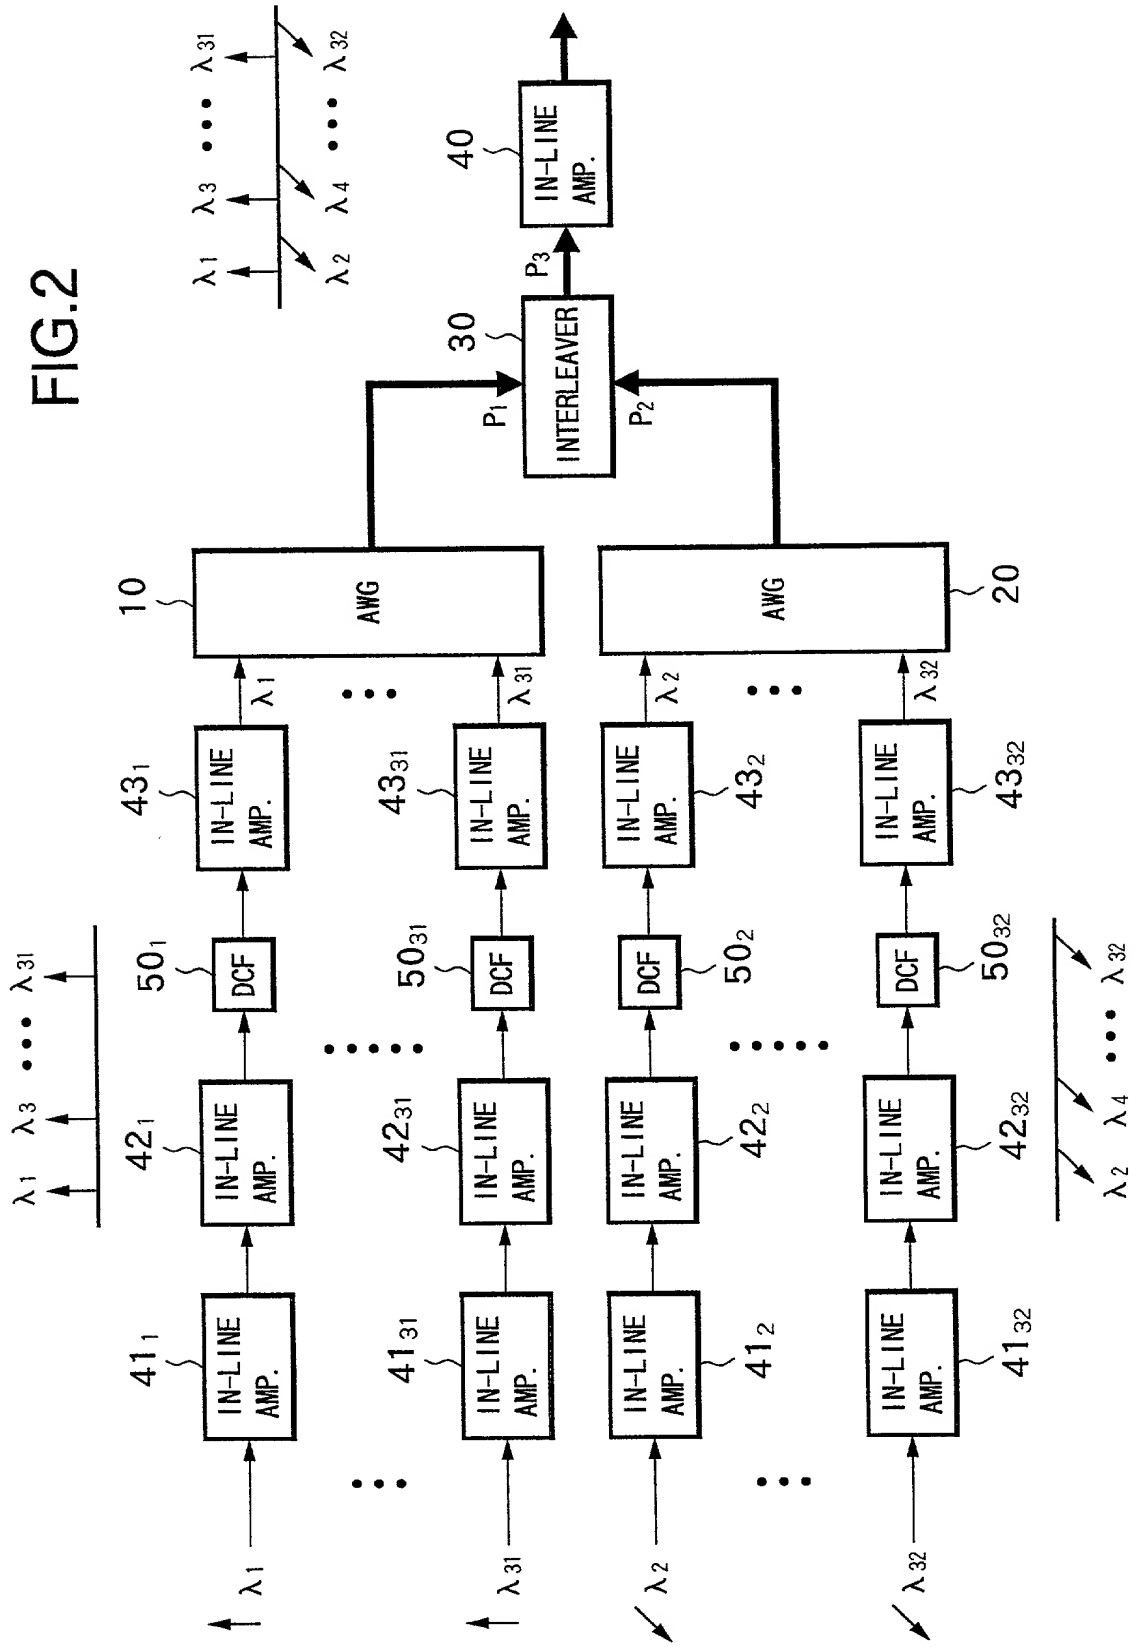

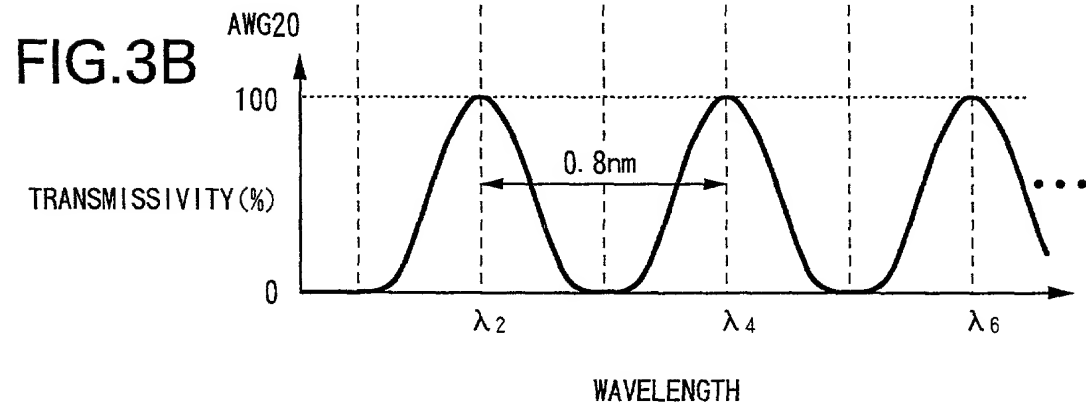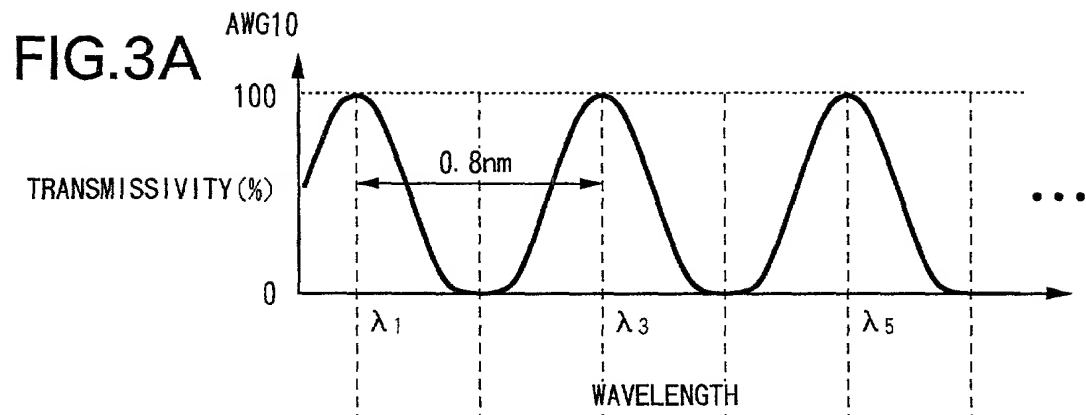



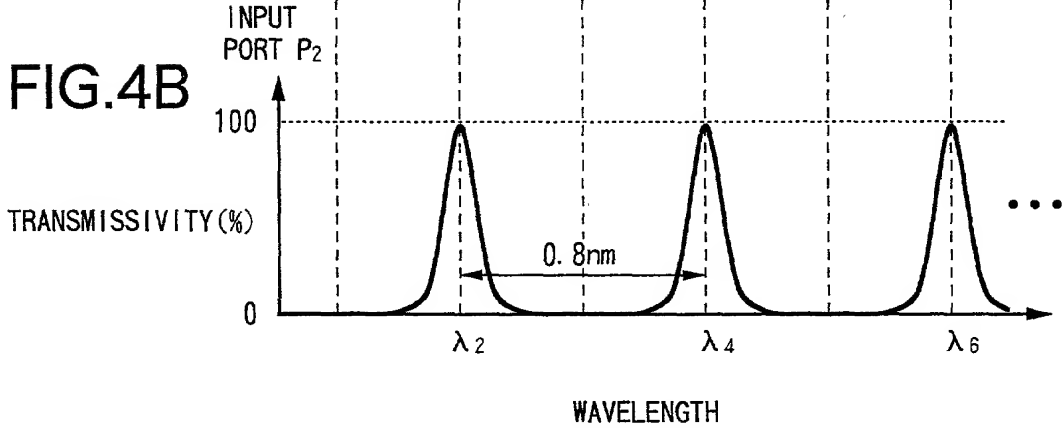


FIG.5

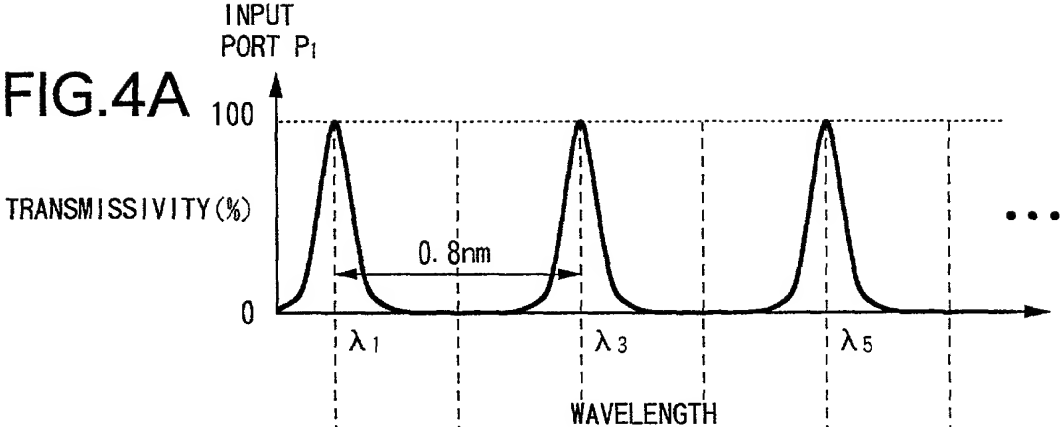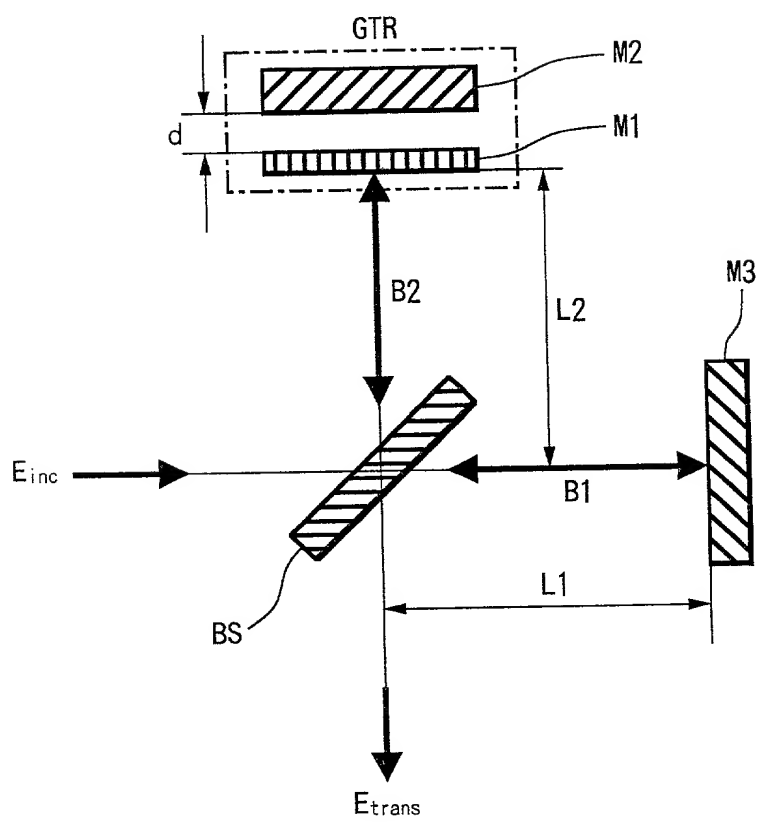

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

OPTICAL MULTIPLEXING APPARATUS

AND OPTICAL MULTIPLEXING METHOD

上記発明の明細書（下記の欄でx印がついていない場合は、本表に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一ヵ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

2000-149412

(Number)
(番号)

JAPAN

(Country)
(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

22/05/2000

(Day/Month/Year Filed)
(出願年月日)

☐

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願年月日)

☐

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許審判局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938; Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor Katsuhiko SUGA		
発明者の署名	日付	Inventor's signature Katsuhiko Suga	Date 16/11/2000
住所	Residence Kawasaki, JAPAN		
国籍	Citizenship JAPAN		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa-ken, 211-8588 JAPAN		
第二共同発明者	Full name of second joint inventor, if any Takanori MAKI		
第二共同発明者	日付	Second inventor's signature Takanori Maki	Date 16/11/2000
住所	Residence Kawasaki, JAPAN		
国籍	Citizenship JAPAN		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa-ken, 211-8588 JAPAN		

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)